

JAX TROLLEY-GLIDE FREE


Premium Trolley Lubricants

PRODUCT DESCRIPTION

Trolley-Glide Free is a direct food contact lubricant for food processing plants that provides the ultimate in conveyor performance and cleanliness where traditional mineral oils would cause MOSH/MOAH concerns. Trolley-Glide Free provides the benefits most desired in packing plant trolley applications including excellent metal wetting capabilities, rust protection, and non-drip characteristics. Additionally, it reacts synergistically with wash down compounds to aid in removing old oil, dirt, animal hair and fats.

PRODUCT BENEFITS

- **Direct-contact** – Trolley-Glide Free is specially formulated using carefully selected base oils and additives that have been approved as Generally Recognized As Safe (GRAS) and/or safe for human consumption.
- **Excellent low temperature performance** – JAX Trolley-Glide Free remains fluid for extended periods of time when applied to the trolley and exposed to the low temperatures commonly seen in snap chill operations and coolers.
- **Superior additive performance** – Formulated to provide superior rust and corrosion protection, outstanding metal wetting characteristics, and excellent lubricity to minimize downtime and maximize trolley life.
- **MOSH/MOAH-Free** – Contains no MOSH/MOAH content, limiting exposure concerns with saturated and aromatic hydrocarbons on food product.
- **NSF 3H-Registered**
- **Kosher Pareve Certified**

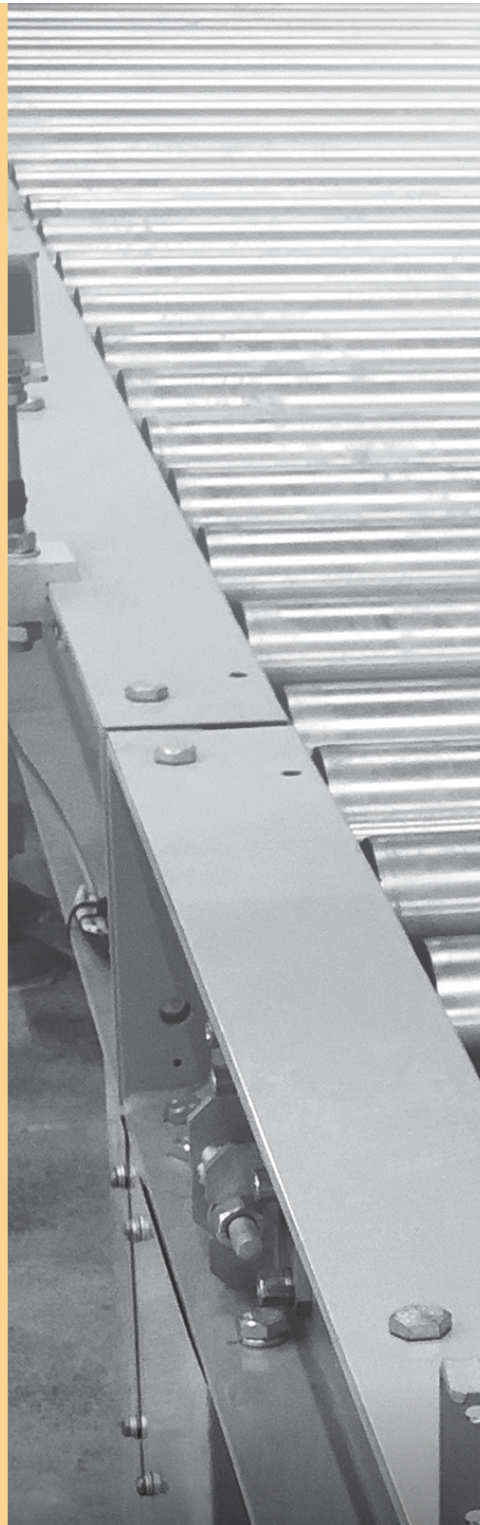

APPLICATIONS

- Recommended for trolleys and overhead chains where direct food contact may be unavoidable



jax.com



TYPICAL PROPERTIES	TROLLEY-GLIDE FREE	METHOD
Viscosity at 40°C, cSt	24.8	ASTM D 445
Flash Point, °C	213.5	ASTM D 93
Specific Gravity	0.9373	ASTM D 1298
Four Ball Wear, mm	0.41	ASTM D 4172

JAX products undergo continual improvement in formulation and manufacture. The values indicated in this PDS are typical production values at the time of this writing. JAX reserves the right to alter and update product data and typical values at any time without notice. It is the responsibility of the installer and/or purchaser to determine if these specifications are adequate and proper for the intended application. MSDS information may be found at JAX.com or by contacting JAX INC.

COMPATIBILITY

JAX Trolley-Glide Free is formulated to be compatible with metallurgies typically seen in trolleys and overhead chains.

PACKAGING

CONTAINER SIZE	TROLLEY-GLIDE FREE
55 Gallon Drum	TGFREE-055
5 Gallon Pail	TGFREE-005